
WP8



Sello rascador de limpieza para cilindros hidráulicos, fabricado en poliuretano, con labio sobresaliente y segmentos de soporte que evitan el giro. Ofrece alta resistencia al desgaste y elimina impurezas de la varilla durante la retracción

Cleaning scraper seal for hydraulic cylinders, made of polyurethane, with protruding lip and support segments that prevent rotation. Offers high wear resistance and removes impurities from the rod during retraction.



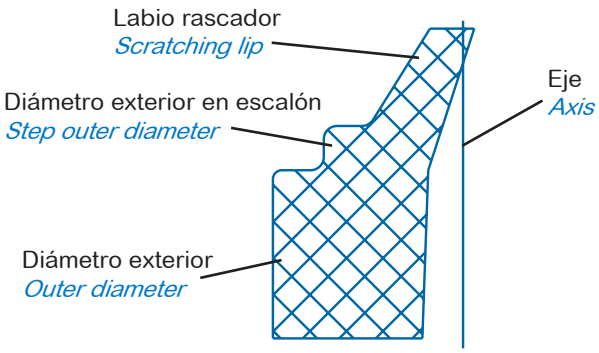

-40ºC 100ºC	<1m/s		- -	3.5mm 250mm

-Labio sobresaliente que elimina impurezas de la varilla durante la retracción.
-Segmentos de soporte que evitan el giro en el alojamiento.
-Fabricado en PU, material de alta resistencia al desgaste.
-Soporta velocidades de hasta 2 m/s.
-No requiere orificio de alivio de presión.
-Larga vida útil y diseño fiable para aplicaciones industriales.
-Adecuado para entornos con alta contaminación.


-Protruding lip that removes impurities from the rod during retraction.
-Support segments that prevent rotation in the housing.
-Made of PU, a material with high resistance to wear.
-Supports speeds of up to 2 m/s.·
-No pressure relief hole required.
-Long service life and reliable design for industrial applications.
-Suitable for environments with high pollution.

Rascador fabricado en poliuretano (PU), que admite temperaturas de trabajo de -30 °C a 100 °C. Es un material que destaca por su gran flexibilidad y resistencia al desgaste, ofreciendo excelente elasticidad y recuperación tras la deformación. Presenta una alta resistencia a la abrasión, al desgarro y a los aceites hidráulicos, grasas y fluidos ignífugos, manteniendo sus propiedades mecánicas en un amplio rango de temperaturas.


Scraper made of polyurethane (PU), which accepts working temperatures from -30 °C to 100 °C. It is a material that stands out for its great flexibility and resistance to wear, offering excellent elasticity and recovery after deformation. It has a high resistance to abrasion, tearing and hydraulic oils, greases and flame retardant fluids, maintaining its mechanical properties over a wide range of temperatures.

Antes de la instalación, debe desbarbar los bordes y realizar chaflanes y radios suaves. Es imprescindible limpiar cuidadosamente el alojamiento, eliminando polvo, suciedad y virutas metálicas. Debe lubricar las superficies de montaje y el propio rascador. La instalación se realiza en alojamientos axialmente semicerrados, asegurando el correcto encaje y evitando daños en el componente.


Before installation, you need to deburr the edges and make chamfers and smooth radii. It is essential to carefully clean the housing, removing dust, dirt and metal shavings. You should lubricate the mounting surfaces and the scraper itself. The installation is carried out in axially semi-closed housings, ensuring the correct fit and avoiding damage to the component.

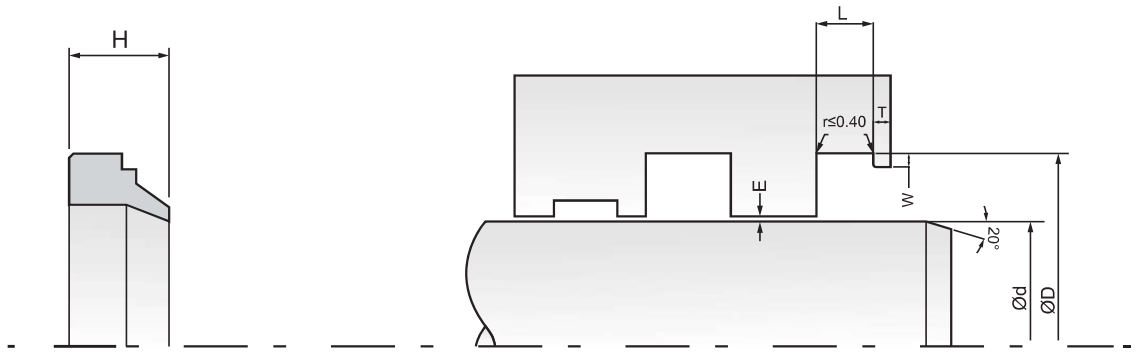

NO.	Ød	ØD	H
W-3,5X12X7/4 WP8	3,5	12	7
W-4X12X7/4 WP8	4	12	7
W-8X16X7/4 WP8	8	16	7
W-10X18X7/4 WP8	10	18	7
W-10X16X5/2,6 WP8	10	16	5
W-12X20X7/4 WP8	12	20	7
W-12X18X5/2,6 WP8	12	18	5
W-14X22X7/4 WP8	14	22	7
W-14X20X5/3,1 WP8	14	20	5
W-15X23X7/4 WP8	15	23	7
W-16X24X7/4 WP8	16	24	7
W-16X22X5/3,1 WP8	16	22	5
W-17X25X7/5 WP8	17	25	7
W-18X26X7/4 WP8	18	26	7
W-20X28X7/4 WP8	20	28	7
W-20X26X5/3,1 WP8	20	26	5
W-22X30X7/4 WP8	22	30	7
W-24X32X7/4 WP8	24	32	7
W-25X33X7/4 WP8	25	33	7
W-25X35X7/4 WP8	25	35	7
W-25X34X8/5 WP8	25	34	8
W-26X34X7/4 WP8	26	34	7
W-28X36X7/4 WP8	28	36	7
W-30X38X7/4 WP8	30	38	7
W-30X40X7/4 WP8	30	40	7
W-32X40X7/4 WP8	32	40	7
W-33X41X7/4 WP8	33	41	7
W-34X42X7/4 WP8	34	42	7
W-35X43X7/4 WP8	35	43	7
W-35X45X7/4 WP8	35	45	7
W-36X44X7/4 WP8	36	44	7
W-38X46X7/4 WP8	38	46	7
W-40X48X7/4 WP8	40	48	7
W-42X50X7/4 WP8	42	50	7
W-44X52X7/4 WP8	44	52	7
W-45X53X7/4 WP8	45	53	7
W-48X56X7/4 WP8	48	56	7
W-50X58X7/4 WP8	50	58	7

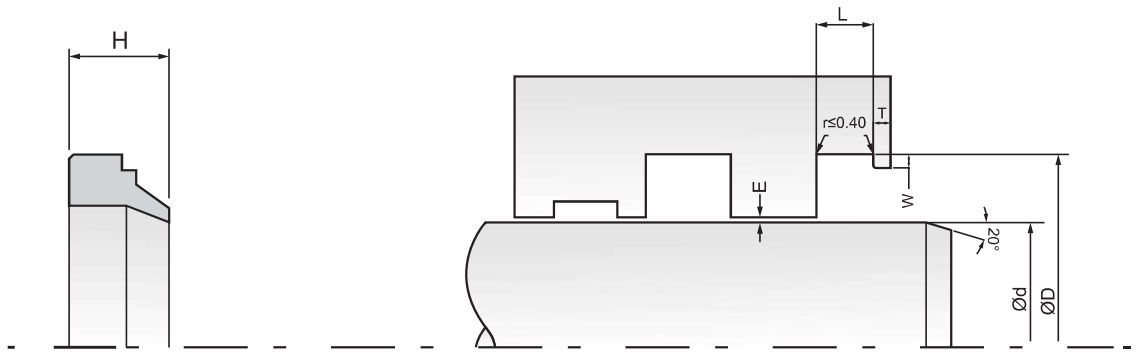

NO.	Ød	ØD	H
W-50X62X10/5,5 WP8	50	62	10
W-51X59X7/4 WP8	51	59	7
W-52X60X7/4 WP8	52	60	7
W-54X62X7/4 WP8	54	62	7
W-55X63X7/4 WP8	55	63	7
W-56X64X7/4 WP8	56	64	7
W-57X65X7/4 WP8	57	65	7
W-60X68X7/4 WP8	60	68	7
W-62X70X7/4 WP8	62	70	7
W-63X71X7/4 WP8	63	71	7
W-65X73X7/4 WP8	65	73	7
W-68X76X7/4 WP8	68	76	7
W-70X78X7/4 WP8	70	78	7
W-75X83X7/4 WP8	75	83	7
W-78X86X7/4 WP8	78	86	7
W-80X88X7/4 WP8	80	88	7
W-82,5X90,6X7/5 WP8	82,5	90,6	7
W-85X93X7/4 WP8	85	93	7
W-90X98X7/4 WP8	90	98	7
W-90X104X10/5,6 WP8	90	104	10
W-95X103X7/4 WP8	95	103	7
W-100X108X7/4 WP8	100	108	7
W-106X118X10/5 WP8	106	118	10
W-110X118X7/4 WP8	110	118	7
W-110X122X10/5,5 WP8	110	122	10
W-115X127X10/5,5 WP8	115	127	10
W-120X132X10/5,5 WP8	120	132	10
W-125X137X10/5,5 WP8	125	137	10
W-130X142X10/5,5 WP8	130	142	10
W-135X147X10/5,5 WP8	135	147	10
W-140X152X10/5,5 WP8	140	152	10
W-145X157X10/5,5 WP8	145	157	10
W-150X162X10/5,5 WP8	150	162	10
W-155X167X10/5,5 WP8	155	167	10
W-160X172X10/5,5 WP8	160	172	10
W-165X177X10/5,5 WP8	165	177	10
W-180X192X10/5,5 WP8	180	192	10
W-190X202X10/5,5 WP8	190	202	10

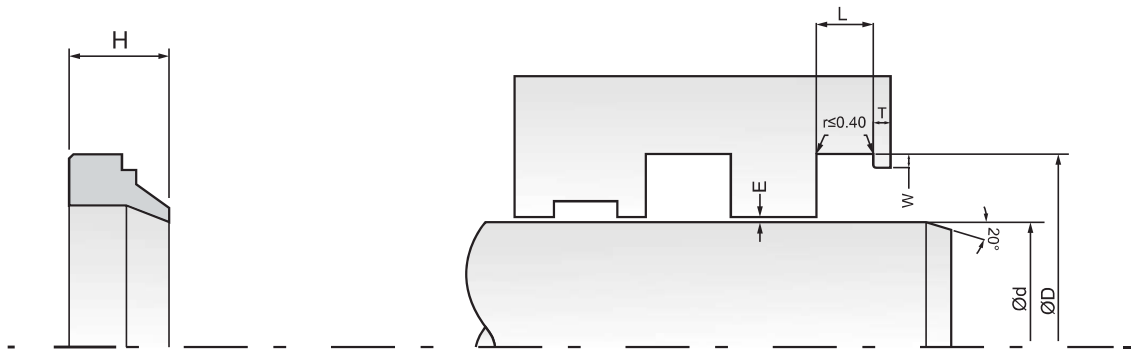

NO.	Ød	ØD	H
W-200X212X10/5,5 WP8	200	212	10
W-210X225X13/6,5 WP8	210	225	13
W-220X235X13/6,5 WP8	220	235	13
W-230X245X13/6,5 WP8	230	245	13
W-250X265X13/6,5 WP8	250	265	13